42" GRADER BLADE

MFG. NO. 1690038 42" GRADER BLADE
OPERATORS MANUAL

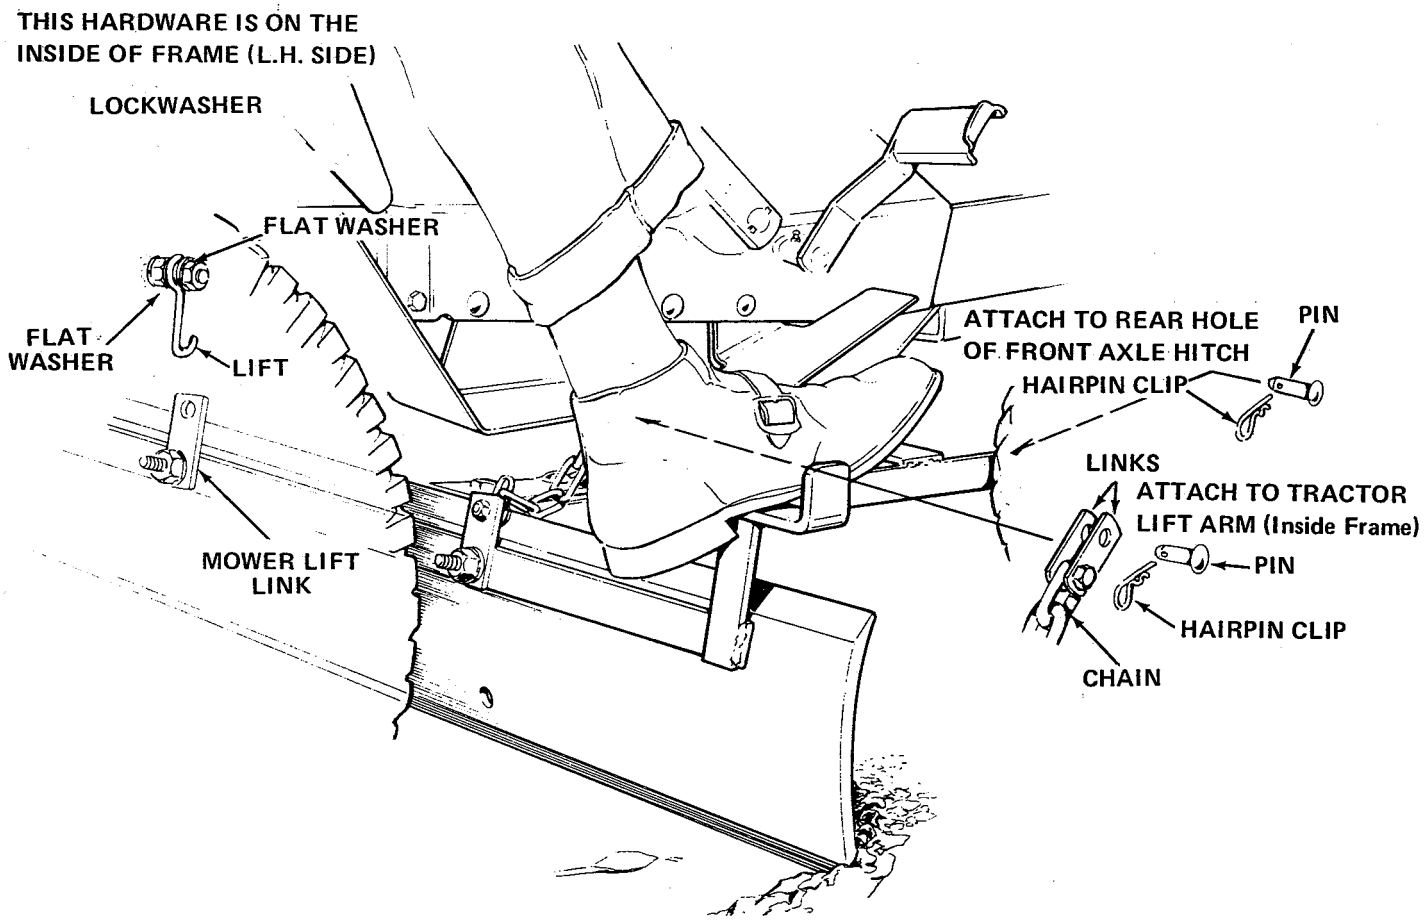

RECOMMENDED ACCESSORIES

Four rear tire chains (One per rear tire)

Four rear wheel weights (Two per rear wheel)

OPERATION

The grader blade is ideal for leveling and smoothing dirt, gravel, etc. After positioning the blade at the desired angle, move to the work area with the lift lever locked in the raised position. Use first or second gear and an engine speed of 1/2 to full throttle depending upon the terrain and type of work to be done. Release the lift lever and lower the grader blade to the operating position. Slowly release the clutch, moving forward into the area to be leveled.

If increased weight is needed to level or move hard ground, you may rest your feet on the top of the blade, as illustrated and apply pressure as necessary.

MAINTENANCE

Occasionally, place a few drops of light engine oil on all pivot points. The useful life of the blade is doubled by reversing it. Simply remove the two blade mounting bolts, turn the blade upside down and re-install the bolts.

FORM - 1651209
PRINTED IN U.S.A.
744